

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity :
AIA #:	SIS # :

Model: **GPZ225A-ETL**

Pizza prep-table refrigerator



Electronic controller



Magnetic removable gasket without tools



Internal bottom made in S/S with stamped rounded corners to facilitate the cleaning procedures.



Plastic pans

Standard Model Features:

Is designed with enduring quality that will improve the efficiency and production of your restaurant. Constructed with stainless steel AISI 304 interior & exterior.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (HCFC free) R452a refrigerant.
- Temperature Range, getting the best in food preservation:
- Coolers adjustable from (28 to 46°F).
- Ventilated - autodefrost -auto evaporation - front -breathing
- Evaporator coil & condenser balanced for low power consumption - holding the widest temperature range in its class.
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades with a more efficient low velocity, high volume airflow design.

CABINET ARCHITECTURE

- All made in stainless steel AISI 304
- Higher insulation rates thanks to high-tech environmentally friendly CFC free, Cyclopentane foaming keeping insulation properties longer than other foams. 5% of energy consumption savings guarantee if compared to other CFC free foams.
- No . 6 casters (2 with break)
- Power cord and plug supplied
- Electronic digital temperatur controller
- Insulation : Ciclopentane High density foamed in place environmentally friendly.

Kyoto Protocol Compliant:

ODP = 0 (Ozone Depletion Potential)

GWP = 5 (Global Warming Potential) polyurethane keeps energy costs low.

DOORS

Nr. 3 doors , gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

Nr.1 Epoxy coated wire shelf standard, installed per full door section 460x660mm (18"x26")

PANS CONFIGURATION

Nr. 10 GN1/3 (not included)

MODEL FEATURES

- Electronic digital temperatur controller with alarms.
 - Evaporator is epoxy coated to eliminate the potential of corrosion.
 - Unit completely pre-wired at factory and ready for final connection to a dedicated outlet.
- Cord and plug set included: Voltages:
115V/60Hz/1 phase

Options and Accessories :

Upcharge and lead times may apply

- Feet

Specification may change without prior notice


Model	Capacity Lt / ft ³	Ambient temp. °C/°F	Cabinet / Packing Dimensions			Voltage	Amp	Shipping Weight
GPZ225A-ETL	620 / 21,89	38° / 100,4°	mm / inches			115/60/1	5 + 1,5	450kg/992Lbs
Temp. °C / °F	Door	Absorbed Power W	L	D	H	Plug	"L" Guide	Gas
-2° , 8° C 28° , 46° F	3	400 + 130	224,5 (cm) 88 1/4"	80 (cm) 31 1/2"	147,5(cm) 58 1/16"	NEMA 5-15P	12 pairs	R452A
			237(cm) 93 5/16"	91 (cm) 35 13/16"	131(cm) 51 9/16"			



Model specifications:

Dimensional data		Electrical data	
Capacity	21,89	Voltage (int'l)	115V / 60Hz / 1 Ph
Width, Overall (in.)	88 1/4	Absorbed Power	400/130 W
Depth, Overall (in.)	31 1/2	Amps	5/1,5 A
Depth (in.) (doors open 90°)	52 17/32	Cord / Plug	NEMA 5-15P
Height, Overall (in.) (incl. feet or casters)	58 1/16	Refrigerant data	
No. of doors	3	Condensing Unit Size (H.P.)	1/4
No. of shelves	3	Capacity (BTU/Hr) *	3000
Shelf Area (sq.ft.)	3,26	Shipping data	
Max load shelf (lbs)	105	Height - Crated (in)	51 9/16
Temp. Range (°F)	28° , 46°	Width - Crated (in)	93 5/16
Ambient temp. (°F)	100,4°	Depth -Crated (in)	35 13/16
		Weight (lbs)	992

Model Plan Views

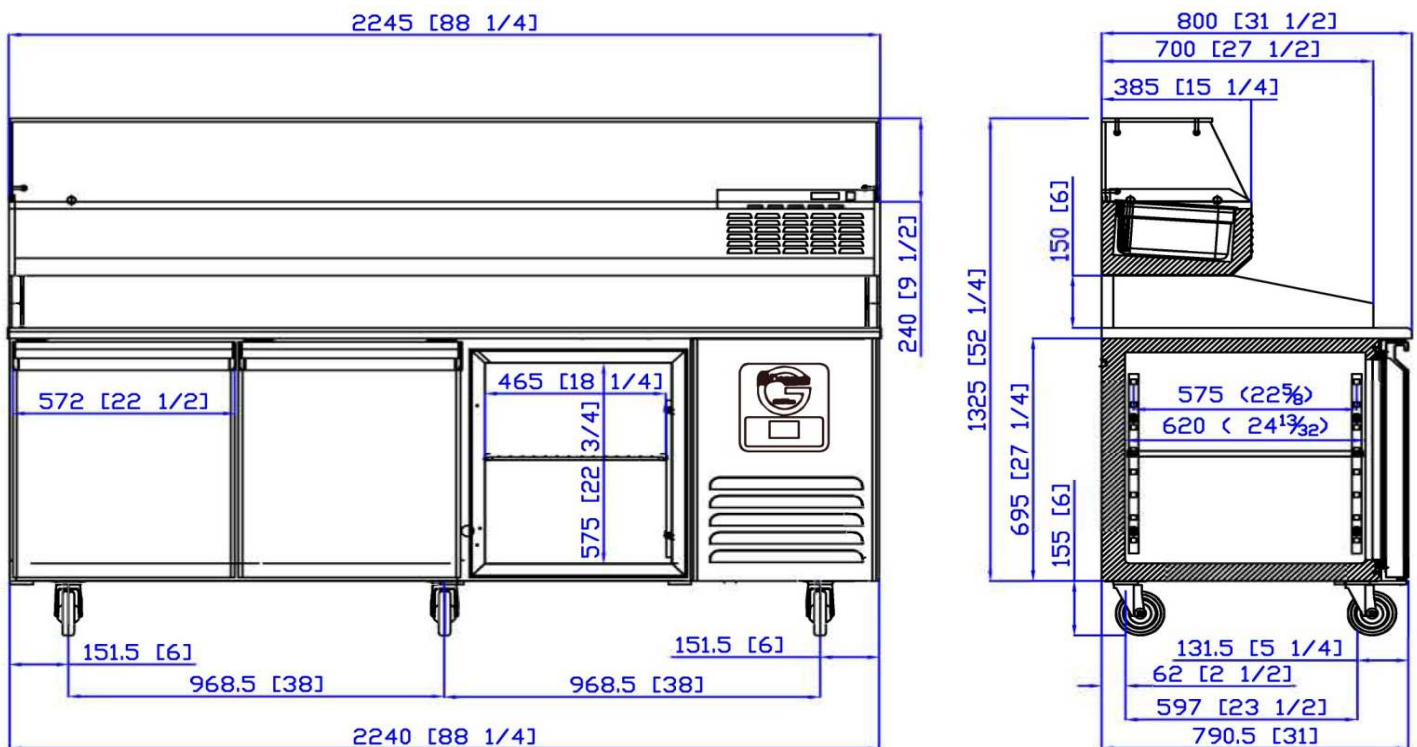

NOT INCLUDED

